

Preparation of compressed air → Maintenance units and components

Distributor, Series AS2-DIS

► G 1/4 - G 3/8 ► Distributor 3x ► ATEX certified



00119389

ATEX	II 2G2D T4 X
Version	Can be assembled into blocks
Installation location	arbitrary
Ambient temperature min./max.	-10°C / +50°C
Medium temperature min./max.	-10°C / +50°C
Working pressure min./max.	0 bar / 16 bar
Medium	Compressed air
Materials:	
Housing	Polyamide
Threaded bushing	Die cast zinc
Cover	Acrylonitrile butadiene styrene
Seal	Acrylonitrile Butadiene Rubber

Technical Remarks

- Suitable for direct mounting of a PE1 and PM1 series pressure sensor (flange version)

	Port	Qn				Weight	Part No.
		1►2	1►3	1►4	1►5		
		[l/min]				[kg]	
	G 1/4	2700				0.25	R412006250
	G 3/8	3600	2000	900	2000		R412006251

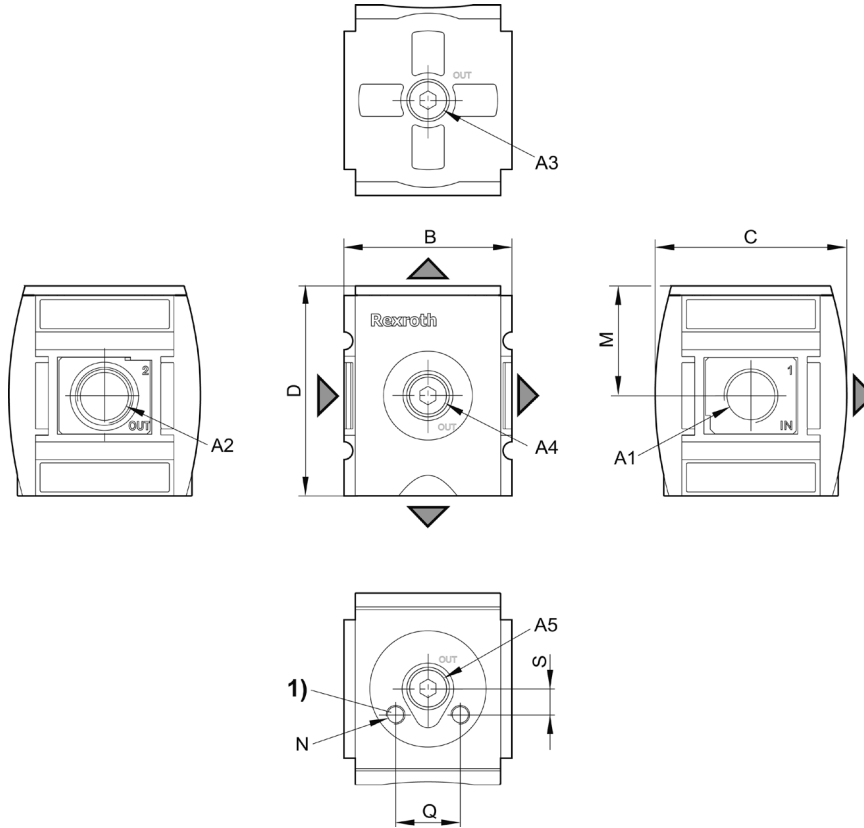
Nominal flow Qn at 6.3 bar and $\Delta p = 1$ bar.

InduParts Pneumatics B.V.B.A. - Sint-Jorisstraat 40 - B-8800 ROESELARE - Belgium
 tel. + 32.(0)51.22.58.88 - fax. + 32.(0)51.22.58.98 - info@induparts.com

Preparation of compressed air → Maintenance units and components

Distributor, Series AS2-DIS

► G 1/4 - G 3/8 ► Distributor 3x ► ATEX certified

Dimensions

00121220

1) Mounting thread for pressure sensor

A1	A2	A3	A4	A5	B	C	D	M	N	Q	S		
G 1/4	G 1/4	G 1/4	G 1/4	G 1/4	52	59	65	34	M5	20	8		
G 3/8	G 3/8	G 1/4	G 1/4	G 1/4	52	59	65	34	M5	20	8		

InduParts Pneumatics B.V.B.A. - Sint-Jorisstraat 40 - B-8800 ROESELARE - Belgium
 tel. + 32.(0)51.22.58.88 - fax. + 32.(0)51.22.58.98 - info@induparts.com